

# Request for Quotation

Fax to: (757) 898-1580

Company: \_\_\_\_\_

Date: \_\_\_\_\_


Address: \_\_\_\_\_

Phone: \_\_\_\_\_


Requested by: \_\_\_\_\_

Fax: \_\_\_\_\_


E-mail: \_\_\_\_\_




Type A-1  
Elevate  
Clockwise




Type A-2  
Descend  
Clockwise




Type A-3  
Elevate  
Counter-  
Clockwise




Type A-4  
Descend  
Counter-  
Clockwise




Type B-1  
Elevate  
Clockwise




Type B-2  
Descend  
Clockwise




Type B-3  
Elevate  
Counter-  
Clockwise




Type B-4  
Descend  
Counter-  
Clockwise




Type C-1  
Elevate  
Clockwise




Type C-2  
Descend  
Clockwise




Type C-3  
Elevate  
Counter-  
Clockwise




Type C-4  
Descend  
Counter-  
Clockwise




Type D-1  
Elevate  
Clockwise



Type D-2  
Descend  
Clockwise



Type D-3  
Elevate  
Counter-  
Clockwise



Type D-4  
Descend  
Counter-  
Clockwise

Product to be Handled: \_\_\_\_\_

Length: \_\_\_\_\_ Min. \_\_\_\_\_ Max.

Width: \_\_\_\_\_ Min. \_\_\_\_\_ Max.

Height: \_\_\_\_\_ Min. \_\_\_\_\_ Max.

Weight: \_\_\_\_\_ Min. \_\_\_\_\_ Max.

Flaps:  Open  Closed

Infeed Height: \_\_\_\_\_

Outfeed Height: \_\_\_\_\_

Elevation Change: \_\_\_\_\_

Direction:  Up  Down

Type/Model: \_\_\_\_\_

Products/Minute: \_\_\_\_\_

Conveyor Speed: \_\_\_\_\_

Power Supply: \_\_\_\_\_

Width (BF) of Infeed Conveyor: \_\_\_\_\_

Width (BF) of Outfeed Conveyor: \_\_\_\_\_

Finish/Color: \_\_\_\_\_

Special Requests: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_


\_\_\_\_\_

\_\_\_\_\_


\_\_\_\_\_

\_\_\_\_\_


# Ryson Spiral Model Naming Key

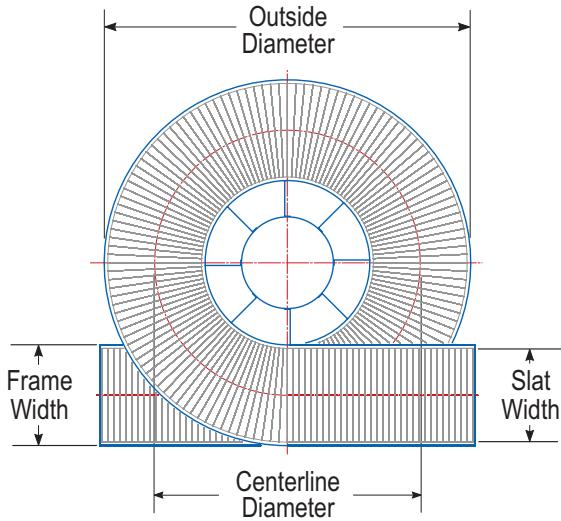

- 1 Elevate Clockwise
- 2 Descend Clockwise
- 3 Elevate Counter Clockwise
- 4 Descend Counter Clockwise

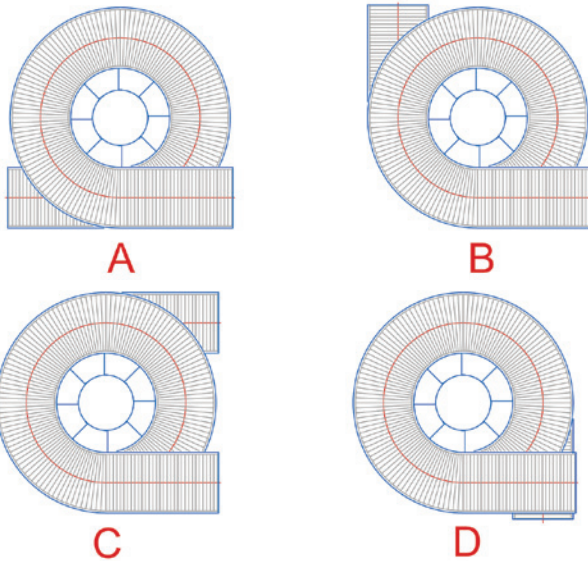

Type	Outside	Centerline	Slat	Frame
1200-200	4'-9" (1450)	3'-11" (1200)	8" (200)	11" (280)
1600-200	6'-3" (1900)	5'-3" (1600)	8" (200)	11" (280)
1200-300	5'-3" (1600)	3'-11" (1200)	12" (300)	1'-3" (380)
1300-400	5'-11" (1800)	4'-3" (1300)	16" (400)	1'-7" (480)
1500-400	6'-7" (2200)	4'-11" (1500)	16" (400)	1'-7" (480)
1800-400	7'-7" (2300)	5'-11" (1800)	16" (400)	1'-7" (480)
1600-500	7'-3" (2200)	5'-3" (1600)	20" (500)	1'-11" (590)
1700-600	7'-11" (2400)	5'-7" (1700)	24" (600)	2'-3" (680)
1800-650	8'-6" (2600)	5'-11" (1800)	26" (650)	2'-5" (740)
<b>High Capacity</b>				
1700-400-HC	7'-3" (2200)	5'-7" (1700)	16" (400)	1'-7" (480)
1700-600-HC	7'-11" (2400)	5'-7" (1700)	24" (600)	2'-3" (680)
<b>Mass Flow</b>				
1900-300	7'-7" (2300)	6'-3" (1900)	12" (300)	-
1900-400	7'-11" (2400)	6'-3" (1900)	16" (400)	-
2300-500	9'-6" (2900)	7'-7" (2300)	20" (500)	-
<b>Dual Track</b>				
1200-200/1800-200	6'-11" (2100)	5'-11" (1800)	8" (200)	-
1200-300/2000-300	7'-11" (2400)	6'-6" (2000)	12" (300)	-
1300-400/2300-400	9'-3" (2800)	7'-7" (2300)	16" (400)	-
1600-500/2800-500	11'-2" (3400)	9'-2" (2800)	20" (500)	-

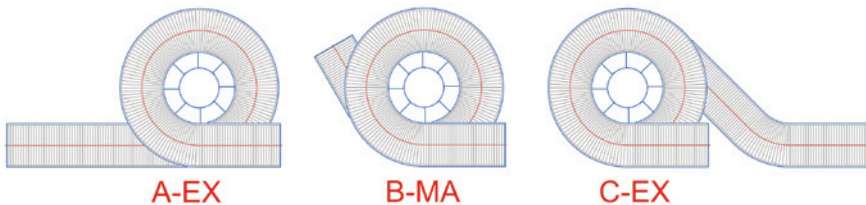

The position and length of the in feed tangent on up spirals and out feed tangent on down spirals can be customized to meet specific layout requirements. Samples are shown above.

**NOTE:** CAD blocks use metric units. They need to be scaled 1/25.4 for inches.



www.ryson.com