

# Request for Quotation

Fax to: (757) 898-1580

Company: \_\_\_\_\_

Address: \_\_\_\_\_


Requested by: \_\_\_\_\_

Date: \_\_\_\_\_


Phone: \_\_\_\_\_

Fax: \_\_\_\_\_


E-mail: \_\_\_\_\_




Type A-1  
Elevate  
Clockwise




Type A-2  
Descend  
Clockwise




Type A-3  
Elevate  
Counter-  
Clockwise




Type A-4  
Descend  
Counter-  
Clockwise




Type B-1  
Elevate  
Clockwise




Type B-2  
Descend  
Clockwise




Type B-3  
Elevate  
Counter-  
Clockwise




Type B-4  
Descend  
Counter-  
Clockwise




Type C-1  
Elevate  
Clockwise




Type C-2  
Descend  
Clockwise




Type C-3  
Elevate  
Counter-  
Clockwise




Type C-4  
Descend  
Counter-  
Clockwise




Type D-1  
Elevate  
Clockwise



Type D-2  
Descend  
Clockwise



Type D-3  
Elevate  
Counter-  
Clockwise



Type D-4  
Descend  
Counter-  
Clockwise

Product to be Handled: \_\_\_\_\_

Length: \_\_\_\_\_ Min. \_\_\_\_\_ Max.

Width: \_\_\_\_\_ Min. \_\_\_\_\_ Max.

Height: \_\_\_\_\_ Min. \_\_\_\_\_ Max.

Weight: \_\_\_\_\_ Min. \_\_\_\_\_ Max.

Flaps:  Open  Closed

Infeed Height: \_\_\_\_\_

Outfeed Height: \_\_\_\_\_

Elevation Change: \_\_\_\_\_

Direction:  Up  Down

Type (A-4, B-2 etc.) \_\_\_\_\_

Products/Minute: \_\_\_\_\_

Conveyor Speed: \_\_\_\_\_

Power Supply: \_\_\_\_\_

Controls Voltage: \_\_\_\_\_

Width (BF) of Infeed Conveyor: \_\_\_\_\_

Width (BF) of Outfeed Conveyor: \_\_\_\_\_

Finish/Color: \_\_\_\_\_

Special Requests: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_


\_\_\_\_\_

\_\_\_\_\_


\_\_\_\_\_

\_\_\_\_\_

# Ryson Spiral Model Naming Key

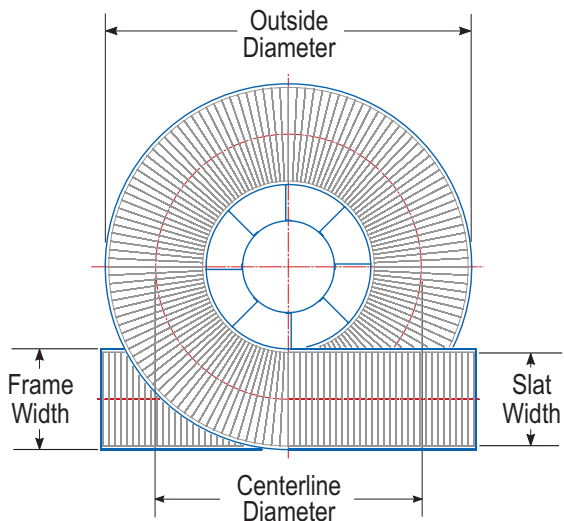


- 1 Elevate Clockwise**
- 2 Descend Clockwise**
- 3 Elevate Counter Clockwise**
- 4 Descend Counter Clockwise**

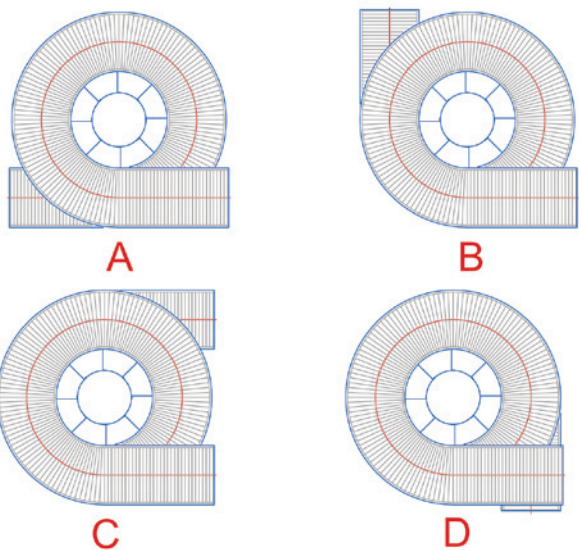

Model	Outside Diameter	Centerline Diameter	Slat Width	Frame Width
I 100-150-NT	4'-2" (1270)	3'-8" (1100)	6" (150)	6" (160)
I 200-230-NT	4'-9" (1450)	3'-11" (1200)	9" (230)	9" (240)
I 200-300	5'-3" (1600)	3'-11" (1200)	12" (300)	15" (380)
I 300-400	5'-11" (1800)	4'-3" (1300)	16" (400)	19" (480)
I 500-400	6'-7" (2200)	4'-11" (1500)	16" (400)	19" (480)
I 800-400	7'-7" (2300)	5'-11" (1800)	16" (400)	19" (480)
I 600-500	7'-3" (2200)	5'-3" (1600)	20" (500)	23" (590)
I 700-150-NT	6'-2" (1870)	5'-7" (1700)	6" (150)	6" (160)
I 700-600	7'-11" (2400)	5'-7" (1700)	24" (600)	27" (680)
I 800-650	8'-5" (2590)	5'-11" (1800)	26" (650)	29" (740)
<b>High Capacity</b>				
I 700-400-HC	7'-3" (2200)	5'-7" (1700)	16" (400)	19" (480)
I 700-600-HC	7'-11" (2400)	5'-7" (1700)	24" (600)	27" (680)
I 2200-760-WWT	10'-0" (3050)	7'-3" (2200)	30" (760)	33" (830)
I 3000-900-WWT	13'-0" (3970)	9'-10" (3000)	36" (900)	38" (970)
<b>Mass Flow</b>				
I 900-260-MF	7'-5" (2260)	6'-3" (1900)	10" (254)	10" (254)
I 900-400-MF	7'-11" (2400)	6'-3" (1900)	16" (400)	16" (400)
I 2300-500-MF	9'-4" (2840)	7'-7" (2300)	20" (500)	20" (500)
<b>Dual Track</b>				
I 200-300/2000-300	7'-11" (2400)	6'-6" (2000)	12" (300)	-
I 300-400/2300-400	9'-3" (2800)	7'-7" (2300)	16" (400)	-

**NOTE:** CAD blocks use metric units. They need to be scaled 1/25.4 for inches. *Chart displays the most common models.*

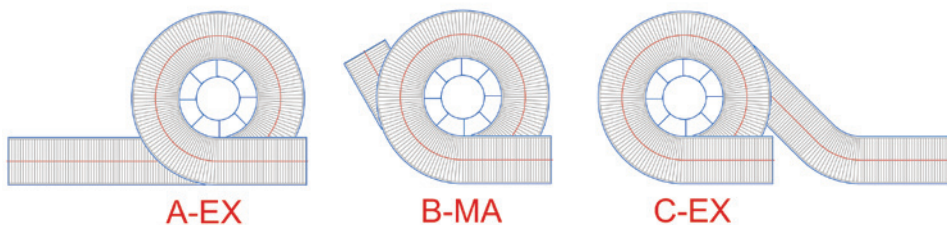

The position and length of the in feed tangent on up spirals and out feed tangent on down spirals can be customized to meet specific layout requirements. Samples are shown above.



www.ryson.com